



OUTPUT VOLTAGE (V)	BATTERY CAPACITY		CURRENT (A)	INPUT VOLTAGE (V)	WEIGHT (KG)	CHARGER TYPE (WA)	MEASUREMENTS IN mm		
	12H RECHARGE	TIME (AH)					A	B	C
SINGLE PHASE MODELS									
12	50 - 65		10 A	230 V	12	RPE 12/10	272	285	250
12	65 - 95		15 A	230 V	12	RPE 12/15	272	285	250
12	95 - 125		20 A	230 V	13	RPE 12/20	272	285	250
12	125 - 155		25 A	230 V	14	RPE 12/25	272	285	250
12	155 - 190		30 A	230 V	15	RPE 12/30	272	285	250
12	190 - 250		40 A	230 V	17	RPE 12/40	272	285	250
12	250 - 315		50 A	230 V	19	RPE 12/50	272	285	250
12	315 - 375		60 A	230 V	21	RPE 12/60	272	285	250
24	50 - 65		10 A	230 V	13	RPE 24/10	272	285	250
24	65 - 95		15 A	230 V	14	RPE 24/15	272	285	250
24	95 - 125		20 A	230 V	15	RPE 24/20	272	285	250
24	125 - 155		25 A	230 V	16	RPE 24/25	272	285	250
24	155 - 190		30 A	230 V	17	RPE 24/30	272	285	250
24	190 - 250		40 A	230 V	19	RPE 24/40	272	285	250
24	250 - 315		50 A	230 V	22	RPE 24/50	335	300	285
24	315 - 375		60 A	230 V	25	RPE 24/60	335	300	285
36	125 - 155		25 A	230 V	20	RPE 36/25	272	285	250
36	155 - 190		30 A	230 V	22	RPE 36/30	272	285	250
36	190 - 250		40 A	230 V	24	RPE 36/40	335	300	285
36	250 - 315		50 A	230 V	26	RPE 36/50	335	300	285
36	315 - 375		60 A	230 V	27	RPE 36/60	335	300	285
24	375 - 500		80	230	39	RTM-2 Mono 24/80	760	500	400
24	500 - 625		100	230	42	RTM-2 Mono 24/100	760	500	400
36	155 - 190		30	230	22	RTM-2 36/30	335	300	285
36	190 - 250		40	230	24	RTM-2 36/40	335	300	285
36	250 - 315		50	230	25	RTM-2 36/50	375	375	340
36	315 - 375		60	230	27	RTM-2 36/60	375	375	340
36	375 - 500		80	230	47	RTM-2 Mono 36/80	760	500	400
36	500 - 625		100	230	55	RTM-2 Mono 36/100	760	500	400
48	315 - 375		60	230	50	RTM-2 Mono 48/60	760	500	400
48	375 - 500		80	230	55	RTM-2 Mono 48/80	760	500	400
48	500 - 625		100	230	62	RTM-2 Mono 48/100	760	500	400
THREE PHASE MODELS									
24	250 - 375		60	3X400	40	RTM-2 24/60	760	500	400
24	375 - 500		80	3X400	45	RTM-2 24/80	760	500	400
24	500 - 625		100	3X400	48	RTM-2 24/100	760	500	400
24	625 - 750		120	3X400	60	RTM-2 24/120	900	500	400
24	750 - 875		140	3X400	65	RTM-2 24/140	900	500	400

OUTPUT VOLTAGE (V)	BATTERY CAPACITY 12H RECHARGE TIME (AH)	CURRENT (A)	INPUT VOLTAGE (V)	WEIGHT (KG)	CHARGER TYPE (WA)	MEASUREMENTS IN mm		
						A	B	C
24	875 - 1000	160	3X400	70	RTM-2 24/160	900	500	400
24	1000 - 1125	180	3X400	75	RTM-2 24/180	900	500	400
36	250 - 375	60	3X400	50	RTM-2 36/60	760	500	400
36	375 - 500	80	3X400	55	RTM-2 36/80	900	500	400
36	500 - 625	100	3X400	63	RTM-2 36/100	900	500	400
36	625 - 750	120	3X400	68	RTM-2 36/120	900	500	400
36	750 - 935	150	3X400	75	RTM-2 36/150	900	500	400
48	250 - 375	60	3X400	58	RTM-2 48/60	900	500	400
48	375 - 500	80	3X400	63	RTM-2 48/80	900	500	400
48	500 - 625	100	3X400	70	RTM-2 48/100	900	500	400
48	625 - 750	120	3X400	75	RTM-2 48/120	900	500	400
48	750 - 875	140	3X400	80	RTM-2 48/140	900	500	400
48	875 - 1000	160	3X400	88	RTM-2 48/160	900	500	400
48	1000 - 1125	180	3X400	96	RTM-2 48/180	900	500	400
72	250 - 375	60	3X400	70	RTM-2 72/60	900	500	400
72	375 - 500	80	3X400	75	RTM-2 72/80	900	500	400
72	500 - 625	100	3X400	87	RTM-2 72/100	900	500	400
72	625 - 750	120	3X400	92	RTM-2 72/120	900	500	400
72	750 - 875	140	3X400	100	RTM-2 72/140	900	500	400
80	250 - 375	60	3X400	71	RTM-2 80/60	900	500	400
80	375 - 500	80	3X400	76	RTM-2 80/80	900	500	400
80	500 - 625	100	3X400	90	RTM-2 80/100	900	500	400
80	625 - 750	120	3X400	95	RTM-2 80/120	900	500	400
80	750 - 875	140	3X400	100	RTM-2 80/140	900	500	400
80	875 - 1000	160	3X400	130	RTM-2 80/160	900	500	400
80	1000 - 1125	180	3X400	150	RTM-2 80/180	900	500	400

RPE DIMENSIONS

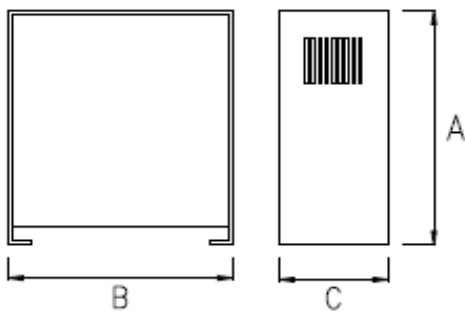

RTM DIMENSIONS

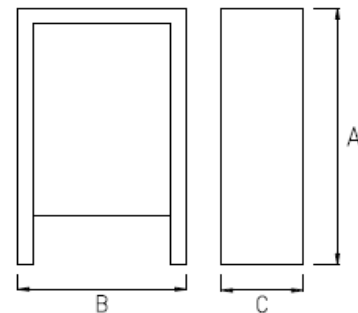

Chloride Batteries S.E. Asia Pte. Limited

106 Neythal Road | Singapore 628594

T: +65 62652444 | F: +65 62651478

W: www.ceilbatterysystems.com/ www.cbsea.com.sg